



# OWNER'S MANUAL

Model MH2005



- Important Safety Instructions
- Assembly Instructions
- Parts and Hardware Identification

# Extreme Platform Cart

## **CAUTION:**

Read, understand and follow ALL instructions before using this product

Tricam International  
7677 Equitable Drive  
Minneapolis, MN 55344  
[www.black-cat-products.com](http://www.black-cat-products.com)  
800-304-1316

REV 5/10/04

# IMPORTANT SAFETY INSTRUCTIONS

1. **READ ALL INSTRUCTIONS CAREFULLY BEFORE USE.** If you do not understand these instructions, need clarification or further explanation, please call our toll free answer line for assistance at **1-800-304-1316** Monday through Friday 8:00 a.m. until 5:00 p.m. CST.
2. Do not load Extreme Platform Cart with more than 2500 lbs.
3. Do not allow children to use unsupervised. This Extreme Platform Cart is not a toy.
4. Always distribute payload evenly.
5. If any parts become damaged, broken or misplaced, do not use the Extreme Platform Cart until replacement parts can be obtained.
6. Do not operate or use on objects that can cause damage to the casters.
7. **SAVE THESE INSTRUCTIONS.**

## DESCRIPTION

This Extreme Platform Cart is highly maneuverable in aisles and tight spots. It is designed for use in shipping and receiving rooms, warehouses, stock rooms, shops, laboratories, stores, etc. Each unit consists of one platform (with handle and caster-mounting hardware), two swivel casters, and two rigid casters.

## ASSEMBLY INSTRUCTIONS


Your Extreme Platform Cart requires assembly. Account for all parts and hardware before beginning assembly. If any parts are missing, damaged, or if you have questions or need additional instructions, **DO NOT RETURN THIS PRODUCT TO THE RETAILER**, call the manufacturer at **1-800-304-1316**.

Tools required for assembly: 14 and 19mm open end wrench and /or two medium adjustable wrenches.

Refer to the exploded drawing and the parts list on the following pages during assembly.


### STANDARD (CORNER PATTERN)

1. Using 4 bolts, nuts, and washers per caster, secure casters to platform deck.
2. Slip handle into either end of the platform. The cart will steer more easily with the handle on the end with the swivel casters.

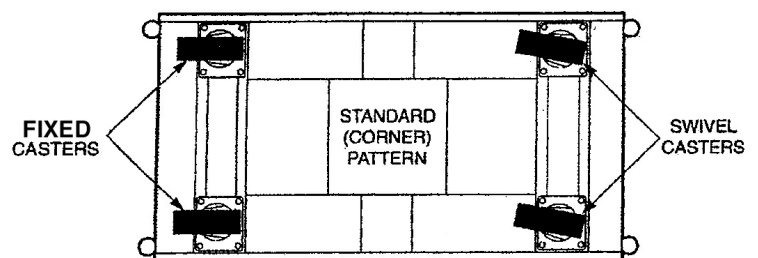

### DIAMOND (TILT) PATTERN

1. When securing the rigid casters to the platform, place one or more washers between the caster plate and the platform for each of the four bolts. **Increasing the number of washers between the caster plate and platform will increase the amount of the tilt.** Install the swivel casters using 4 bolts, nuts, and washers per caster.
2. Slip handle into either end of the platform.

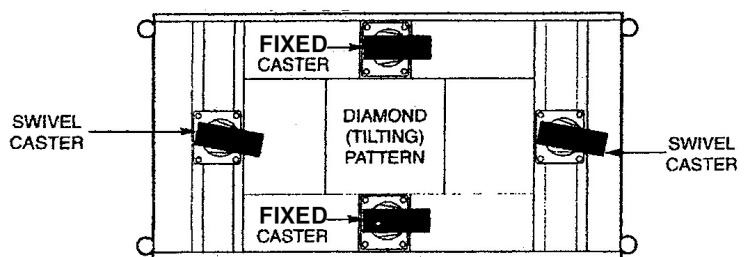

**NOTE:** Diamond-tilt pattern is recommended where a shorter turning radius is required.

The cart will turn in its own radius.

# PARTS AND HARDWARE IDENTIFICATION

- 1 Platform - (1)
- 2 Handle - (1)
- 3 Fixed Caster - (2)
- 4 Swivel Caster - (2)
- 5 Hex Bolts - (16)
- 6 Flat Washers - (16)
- 7 Lock Washers - (16)

